


Product data sheet

Characteristics

33662

MX shunt release, ComPact NS630b to NS3200 fixed, MasterPact NT/NW, rated voltage 200/250 VDC, 200/250 VAC 50/60 Hz

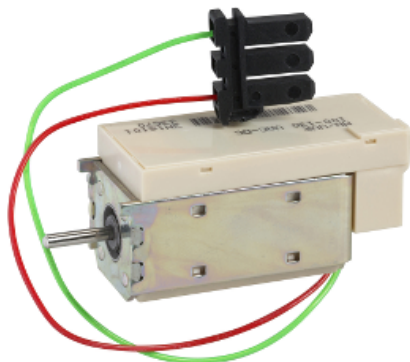

Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW ComPact NS630b...1600 ComPact NS1600b...3200
Voltage release type	Shunt trip release
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

Complementary

Threshold tripping voltage	0.7...1.1 x Un
Supply holding power	4.5 VA
Mounting mode	Fixed
Response time	50 ms (Compact NS630b...1600) 50 ms (Compact NS1600b...3200) 55 ms (Masterpact NT) 70 ms (Masterpact NW)
Accessory / separate part category	Spare parts for Masterpact NT Spare parts for Masterpact NW Spare parts for Compact NS1600b...3200 Spare parts for Compact NS630b...1600

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	152 g
Package 1 Height	3.6 cm
Package 1 width	6.2 cm
Package 1 Length	8.2 cm
Unit Type of Package 2	BB1

Number of Units in Package 2	10
Package 2 Weight	1.556 kg
Package 2 Height	9 cm
Package 2 width	13.2 cm
Package 2 Length	18.5 cm
Unit Type of Package 3	S03
Number of Units in Package 3	120
Package 3 Weight	19.303 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------