




Price* : 37.10 USD

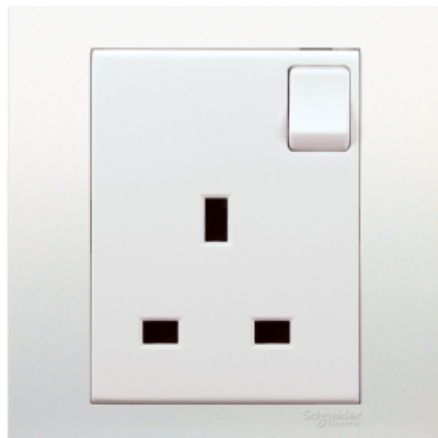

Main

Range	Vivace
Product or component type	Socket-outlet with switch
Device short name	KB15
Device presentation	Complete mechanism

Complementary

Outlet poles configuration	2P + E
Number of gangs	1 gang
Colour tint	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	35 mm
Rated current	13 A at 250 V AC, resistive
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	N Earth L
Tightening torque	0.4 N.m
Clamping connection capacity	2 x 4 mm ² 3 x 2.5 mm ²

* Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Width	87 mm
Height	87 mm

Environment

Standards	MS 589 SS 145 BS 1362-2
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %
Operating altitude	<= 2000 m
Environmental characteristic	Indoor use

Packing Units

Package 1 Weight	91.250 g
Package 1 Height	1.000 cm
Package 1 width	1.000 cm
Package 1 Length	1.000 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------