




Price* : 110.39 USD

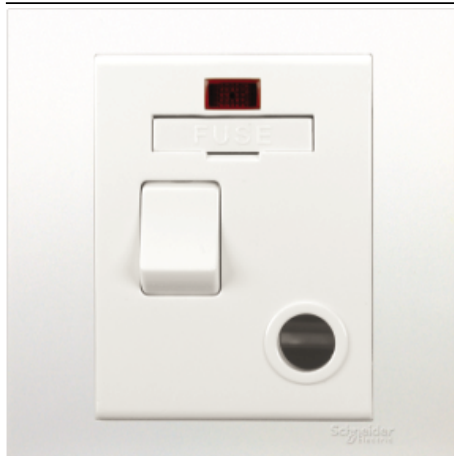

Main

Range	Vivace
Device short name	KB31
Product or component type	Switched fuse mechanism
Device presentation	Complete mechanism

Complementary

Pilot light	neon indicator
Number of gangs	1 gang
Colour tint	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Surface
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	35 mm
Rated current	13 A at 250 V AC, resistive
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	Earth N in L out N out L in

* Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Tightening torque	0.4 N.m
Clamping connection capacity	2 x 4 mm ² input 3 x 2.5 mm ² input 1 x 1.5 mm ² output 1 x 2.5 mm ² output
Width	87 mm
Height	87 mm

Environment

Standards	BS 1363-4
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %
Environmental characteristic	Indoor use

Packing Units

Package 1 Weight	103.000 g
Package 1 Height	1.000 cm
Package 1 width	1.000 cm
Package 1 Length	1.000 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------