




Price\* : 74.21 USD

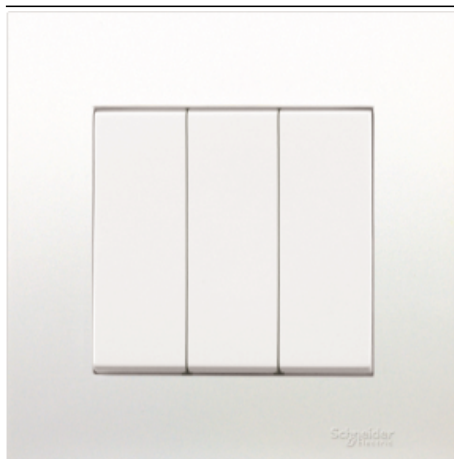

### Main

Range	Vivace
Product or component type	Switch
Device short name	KB33
Device presentation	Complete mechanism

### Complementary

Switch function	2-way
Actuator	Rocker
Number of gangs	3 gangs
Colour tint	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	35 mm
Rated current	16 AX at 250 V AC, inductive 16 AX at 250 V AC, fluorescent
[Ue] rated operational voltage	250 V AC
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	pillar terminal
Terminal identifier	L2 COM L1

\* Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Tightening torque	0.4 N.m
Clamping connection capacity	2.5 mm <sup>2</sup>
Width	87 mm
Height	87 mm

## Environment

Standards	SS 227 MS IEC 60669-1 IEC 60669-1
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %
Environmental characteristic	Indoor use

## Packing Units

Package 1 Weight	95.000 g
Package 1 Height	1.000 mm
Package 1 width	1.000 mm
Package 1 Length	1.000 mm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Contractual warranty

Warranty	18 months
----------	-----------