




Price* : 366.12 USD

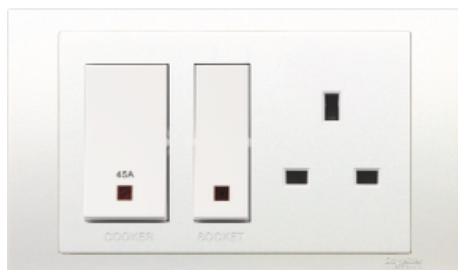

Main

Range	Vivace
Product or component type	Cooker control unit socket
Device short name	KBT15
Device presentation	Complete mechanism
Switch application	Cooker and socket

Complementary

Pilot light	Red neon indicator
Outlet poles configuration	2P + E
Colour tint	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	120.6 mm
Embedding depth	47 mm
Rated current	45 A at 250 V AC, resistive 45 A at 250 V AC, inductive
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	Earth L N
Tightening torque	0.4 N.m

* Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Clamping connection capacity	<= 16 mm ²
Width	146 mm
Height	86 mm

Environment

Standards	BS 4177
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %
Environmental characteristic	Indoor use

Packing Units

Package 1 Weight	165.280 g
Package 1 Height	4.000 mm
Package 1 width	8.700 mm
Package 1 Length	14.700 mm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------