

# RXZE1M4C

socket RXZ -mixed contact - 7 A - 250 V - screw clamp - for relay RXM2.., RXM4..



Price\* : 3.80 USD



## Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Device short name	RXZ
Sale per indivisible quantity	10

## Complementary

[I <sub>th</sub> ] conventional free air thermal current	7 A
[U <sub>e</sub> ] rated operational voltage	250 V AC conforming to IEC 300 V AC conforming to UL
Connections - terminals	Screw clamp terminals, 1 x 0.2...1 x 2.5 mm <sup>2</sup> (AWG 24...AWG 14) flexible with cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm <sup>2</sup> (AWG 20...AWG 16) flexible with cable end Screw clamp terminals, 1 x 0.2...1 x 2.5 mm <sup>2</sup> (AWG 24...AWG 14) solid without cable end Screw clamp terminals, 2 x 0.2...2 x 1.5 mm <sup>2</sup> (AWG 24...AWG 16) solid without cable end
Tightening torque	< 0.8 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	29 mm
Net weight	0.053 kg

## Environment

Standards	IEC 61984
Ambient air temperature for storage	-55...85 °C

\* Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	53 g
Package 1 Height	3 cm
Package 1 width	2.9 cm
Package 1 Length	7.5 cm


### Offer Sustainability

Sustainable offer status	Green Premium product
RECh Regulation	<a href="#">RECh Declaration</a>
RECh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

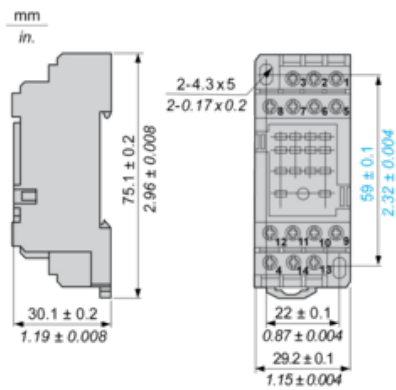

Wiring Diagram

