



Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay REXL with 2 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[I _{th}] conventional free air thermal current	12 A
[U _e] rated operational voltage	< 250 V
Connections - terminals	Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 20...AWG 14) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.058 kg

Environment

Standards	IEC 61984
Product certifications	CSA

Lloyd's
UL

Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Package 1 Weight	48.000 g
Package 1 Height	0.610 dm
Package 1 width	0.270 dm
Package 1 Length	0.750 dm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Socket

Socket with Separate Contact Terminals and Connector for 2 Timed C/O Contacts

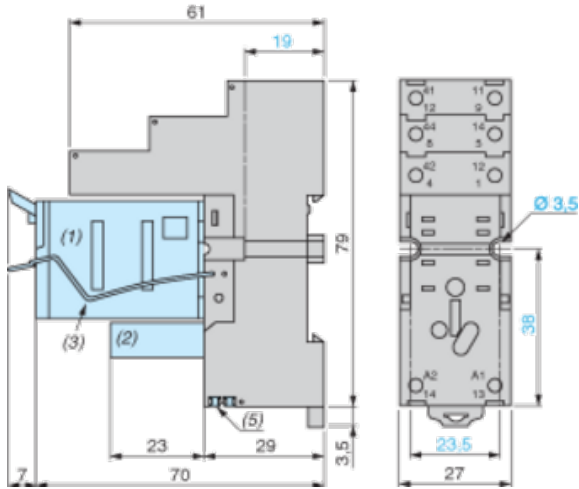

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup
- 5 2 Links connection